
CP 130

Exactly what you need



Concept Patio® 130, uzun yıllardır alüminyum doğrama endüstrisinde tercih edilen sürme sistem olmuştur. Açık köşe, cep, çok raylı ve ince şikan dahil olmak üzere 100'den fazla farklı konfigürasyona sahip en eksiksiz sürme sistemimizdir. Eşik seçeneklerinin çeşitliliği, onu yeni inşaatlar ve yenileme projeleri için eşit derecede uygun hale getirir. Sistem kapsamlı bir şekilde test edilmiş ve sonuçları bağımsız onaylanmış kuruluşlar tarafından doğrulanmıştır. Mevcut geniş profil ve aksesuar yelpazesi sayesinde, projeyi fazla mühendislik yapmadan maliyetleri kontrol altında tutarak ihtiyaçlarınıza tam olarak uyan seçeneği bulabilirsiniz.

Our Concept Patio® 130 has been the go-to sliding system within the aluminium joinery industry for many years. It is our most complete sliding system with 100+ different configurations, including an open corner, pocket, multirail, and a slim chicane. The variety of threshold options make it equally suitable for new-builds and renovation projects. The system is thoroughly tested and its results are verified by independent notified bodies. Because of the broad range of available profiles and accessories, you can find the option exactly fitting your needs without overengineering the project, keeping costs under control.

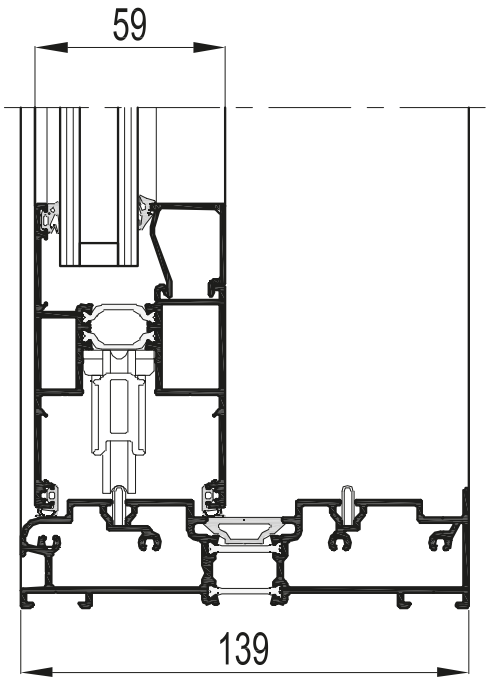

TECHNICAL CHARACTERISTICS			
Variants		CP 130	CP 130-LS
Visible width / height	Frame / Threshold	50 mm / 28 mm	20 mm / 28 mm / 35 mm / 40mm
	Vent	94 mm	94 mm
	T-profile	from 76 mm till 154 mm	from 76 mm till 154 mm
	Meeting section	50mm / 69 mm / 98 mm	50mm / 69 mm / 98 mm
	Meeting section 4 doors	194 mm	194 mm
Overall system depth	Frame	Monorail : 130 mm Duo Rail : 110 mm / 130 mm / 139 mm 3-Rail : 181 mm / 210 mm	Monorail : 139 mm Duo Rail : 139 mm 3-Rail : 210 mm
	Vent	59 mm	59 mm
Maximal Element height		2700 mm	2700 mm
Maximal vent weight		300 kg	300 kg
Rebate height		25 mm	25 mm
Glass thickness		up to 43 mm	up to 43 mm
Glazing method		dry glazing with EPDM or neutral silicones	dry glazing with EPDM or neutral silicones
Thermal insulation		23 mm, 18.6 mm and 32 mm fibreglass reinforced polyamide strips	23 mm and 32 mm fibreglass reinforced polyamide strips
HI variant		extra insulation gaskets	extra insulation gaskets