
SYNEGO KALDIR & SÜR KAPI
Pratik Kullanım

SYNEGO HEBESCHIEBE
Practical Use

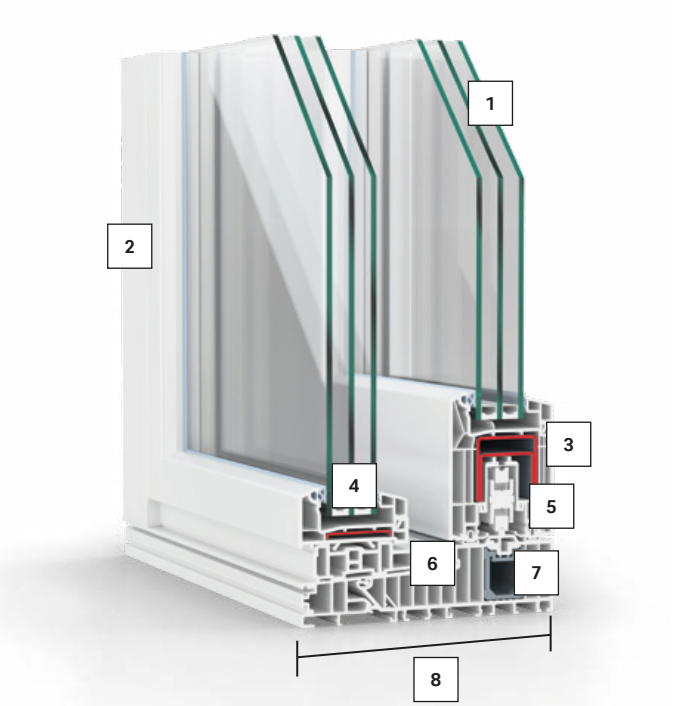

1 **Triple-pane insulated glazing up to 51 mm thick**

2 **HDF surface**
For incomparable brilliance and simple cleaning

3 **Galvanized steel reinforcements**
For optimal stability and lasting functionality

4 **Panoramic sashes profile = 40 mm**
More light for your living space


5 **Track carriage housing**
For efficient manufacturing and stability

6 **High-quality seals**
Against draughts and moisture

7 **Accessible (5 mm or 10 mm)**

8 **190 mm construction depth**



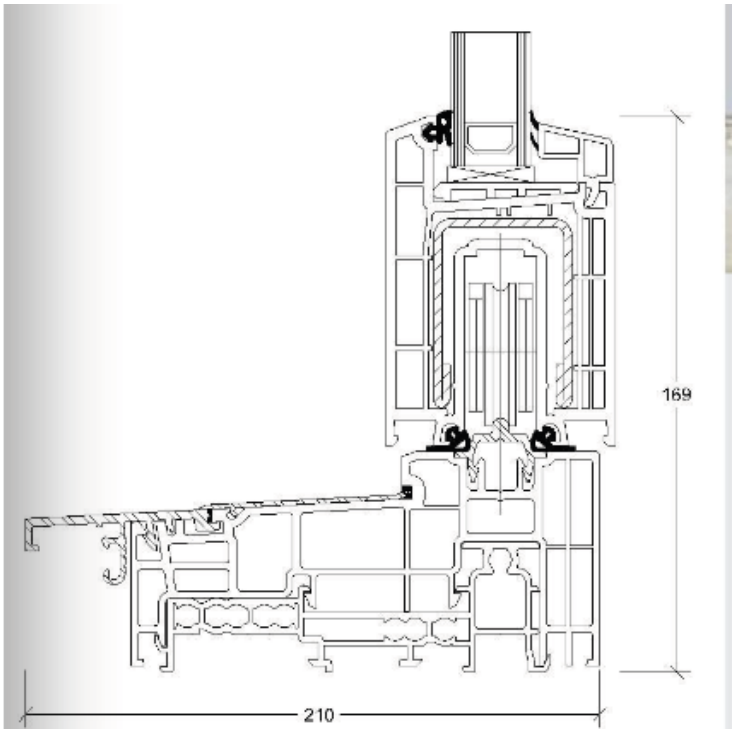

Technical data

Heat insulation	**U_f** value: up to 1,3 W/m²**K**
Overall depth of casing/leaf	190 mm / 80 mm
Burglary prevention	up to resistance class 2 according to DIN EN 1627
Sound insulation	**R_W** up to 43 dB
Opening solution	**Lift and slide door**
Maximum total sash weight	400 kg
Wind load resistance	Up to class B3 in accordance with DIN EN 12210
Rain impermeability	Up to class 9A in accordance with DIN EN 12208
Air permeability	Class 4 in accordance with DIN EN 12207
Mechanical durability	Class 2 in accordance with DIN EN 12400
Profile view width of frame	63 mm
Profile view width of sashes	101 mm / 40 mm **(panoramic sashes)**