
MASTERLINE 8
Windows & Door


REYNAERS aluminium



MasterLine 8, benzersiz bir pencere ve kapıdır. sayısız tasarımı bir araya getiren sistem birinci sınıf performans ile olasılıklar ve üretim hızı. Bu sistem size geniş bir tasarım yelpazesi sunar. herhangi bir mimari stile mükemmel uyum sağlarken, aynı zamanda üstün performans sunar ısı yalıtımı ve hava ve su ile ilgili 77 mm'lik sınırlı sistem derinliği ile sızdırmazlık. Bu yeni nesil yenilikçi pencere ve kapı çözümleri mevcut mimariyi yansıtır sunarken gün ışığını en üst düzeye çıkarma eğilimi nihai yalıtım seviyeleri. MasterLine 8 paneli kapılar bile pasif ev sertifikasına sahiptir.

MasterLine 8 is a unique windows and doors COMFORT system that combines countless design possibilities with first in class performance and production speed. This system gives you a wide design range, to perfectly fit any architectural style, while at the same time offering the ultimate performance regarding thermal insulation and air- and water tightness, with a limited system depth of 77 mm. This new generation of innovative window and door solutions mirrors the current architectural trend towards maximising daylight while offering ultimate insulation levels. MasterLine 8 panel doors even come with passive house certification.



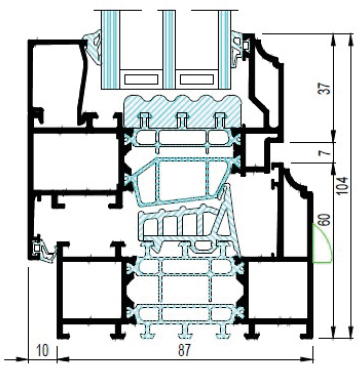

TECHNICAL CHARACTERISTICS		WINDOWS				DOORS	
		FUNCTIONAL	RENAISSANCE	DECO	HIDDEN VENT	WINDOW DOORS	FLUSH DOORS
Min. visible width inward opening window or door	Frame	53 mm			80 mm	60 mm	68.5 mm
	Vent	37 mm			-	67 mm	78.5 mm
Min. visible width outward opening window or door	Frame	21 mm			n.a.	21 mm	42.5 mm
	Vent	113 mm			n.a.	113 mm	104.5 mm
Min. visible width T-profile		80 mm			107 mm	80 mm	80 mm
Overall system depth window or door	Frame	77 mm	87 mm	87 mm	77 mm	77 mm	77 mm
	Vent	87 mm			77 mm	80 mm	77 mm
Rebate height		27 mm					
Glass thickness	Frame	up to 62 mm					
	Vent	up to 72 mm	up to 62 mm	up to 62 mm	up to 57 mm	up to 72 mm	up to 62 mm
Glazing method		dry glazing with EPDM or neutral silicones					
Thermal break		omega-shaped glass fibre reinforced polyamide strips. HI+ version: glass fibre reinforced noryl strips. 40 or 37.8 mm depending on profile.					32 mm