HiFinity


Your dream come true...

REYNAERS aluminium



Nihai tasarım özgürlüğü.
Açık veya cam köşeler, büyük ve bağlantılı cam paneller, motorlu kanatlar, cepler ve alternatif eşik çözümleri ile çok çeşitli konfigürasyonlarda mevcut olan HiFinity, herhangi bir binayı sarabilir. Ve en zorlu talepler için, ihtiyaçlarınıza göre özel olarak tasarlanmış bir çözüm tasarlamak ve sunmak için proje departmanımıza güvenebilirsiniz. Nihai lüks.Siz istediğinizde görünmez olacak şekilde tasarlanmıştır, ancak daha yakından bakıldığında detaylara gösterilen yüksek özen ortaya çıkacaktır.
Mükemmel performanslar, sistemin, deniz kıyısına yakın çok katlı bir otelde olduğu gibi, banliyödeki bir konutta eşit derecede konforlu bir şekilde uygulanmasına izin verir.
Nihai çözüm.
Tüm bunlar, yüksek enerji performansı ve minimalist görünümle birleştiğinde, bu ürünü
düşük enerjili çağdaş mimari için vazgeçilmez çözüm.

Ultimate design freedom.
Available in a wide variety of configurations with open or glass corners, large and connected glass panels, motorised sashes, pockets and alternative threshold solutions, HiFinity can wrap itself around any building. And for the most challenging requests you can rely on our project department to design and deliver a bespoke solution, tailored to your needs. Ultimate luxury. Designed to be invisible when you want it to be, but a closer look will reveal the high attention to detail. The excellent performances allow the system to be implemented equally comfortable in a residential suburban home as in a high-rise hotel near the seaside. Ultimate solution. All of this, in combination with the high energy performance and the minimalistic look, makes this product the go-to solution for low-energy contemporary architecture.

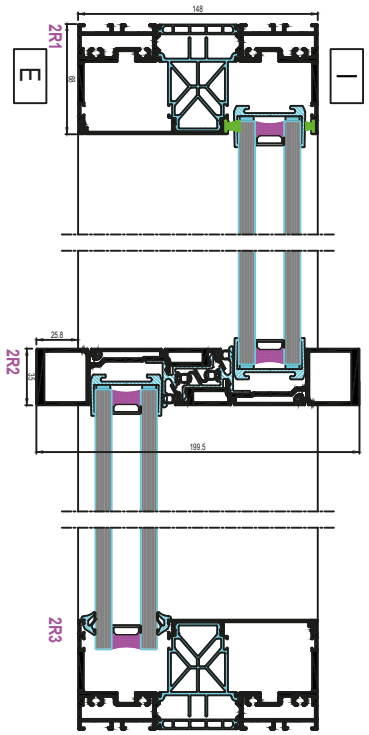

TECHNICAL CHARACTERISTICS			
Variants		DOUBLE GLAZING	TRIPLE GLAZING
Height	Build-in frame	68 mm / 100 mm	
Visible width / height	Vent	8 mm / 10 mm	
	Meeting section	35 mm	
	Meeting section 4 doors	67 mm / 69 mm	
	Wall	35 mm	
Overall system depth	Frame	Duo Rail : 148 mm 3-Rail : 236.5 mm	Duo Rail : 180 mm 3-Rail : 284.5 mm
	Vent	44 mm	60 mm
Maximal element height		4000 mm	
Maximal weight	Manual vent	300 kg	
	Motorized vent	750 kg	
	Fixed glass pane	1200 kg	
Glass thickness		36.5-38.5 mm	52.5-54.5 mm
Glazing method		Structural glazing (sliding) + Standard glazing (fixed)	
Thermal insulation		52 mm fibreglass reinforced polyamide strips	