

RST116

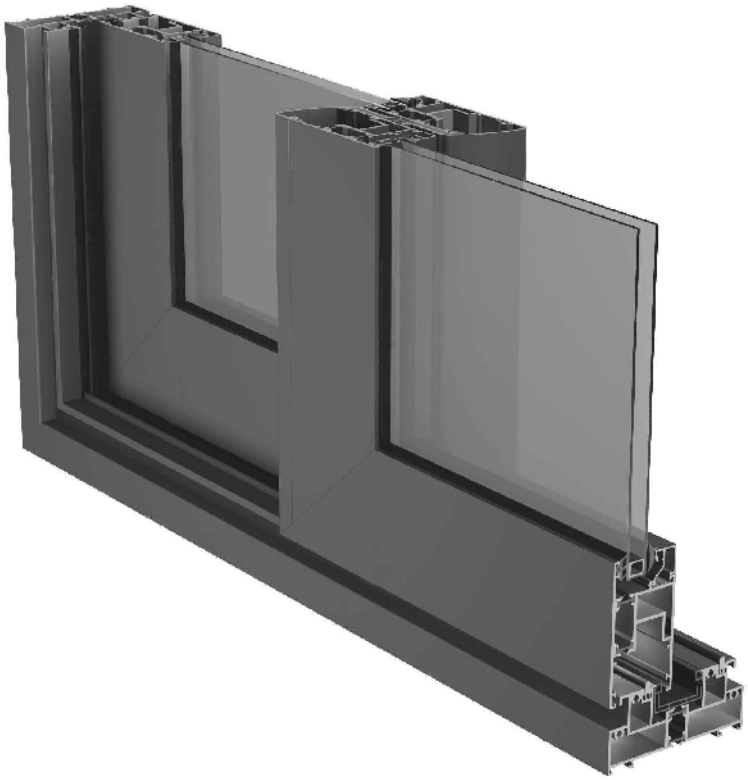

RST116 Yalıtımlı Sürme Sistemi, Kaldır sür aksesuarına uygun yalıtımlı sürme sisteminin 116 mm kasa 52 mm kanat derinliği bulunmaktadır. Et kalınlığı 1,8/2 mm'dir. Kaldır sür ve normal sürme seçenekleri mevcuttur. Pervazlı ve tekli, ikili ve üçlü raylı kullanım kolaylığı ve yüksek kanat yapılabilirliğine imkan veren takviyeli profil seçenegi sunmaktadır.

RST116 Insulated Sliding System, The insulated sliding system suitable for the lift and slide accessory has a 116 mm frame and 52 mm wing depth. Its wall thickness is 1.8/2 mm. Lift drive and normal drive options are available. It offers a reinforced profile option with sills and single, double and triple rails that allows ease of use and high wing construction.

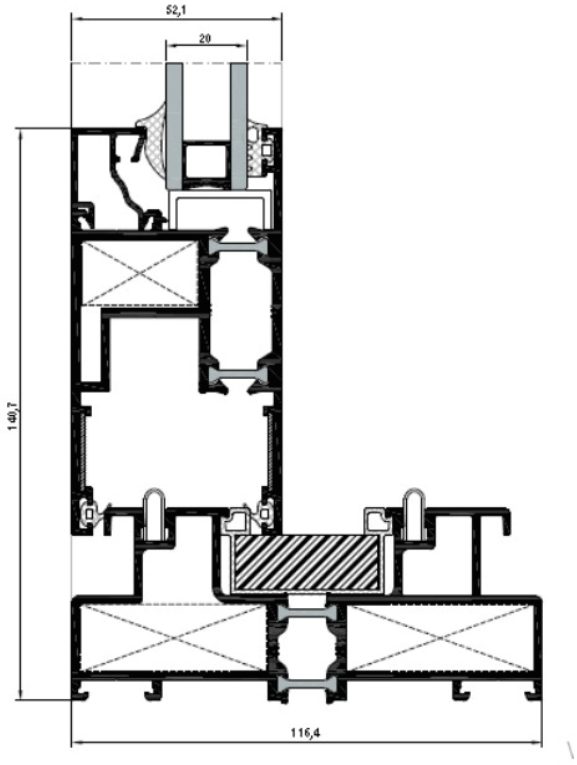

TEKNİK ÖZELLİKLERİ / TECHNICAL PROPERTIES

KASA DERİNLİĞİ / *FRAME DEPTH*	min 116,4 mm-max 180,8mm
KANAT DERİNLİĞİ / *VENT DEPTH*	52,1mm
PROFİL ET KALINLIĞI / *PROFILE WALL THICKNESS*	1,6 / 1,8 / 2mm
CAM KALINLIĞI / *GLASS THICKNESS*	min 5mm-max 33mm
ISI BARİYERLERİ / *THERMAL INSULATION BAR*	14,8mm